
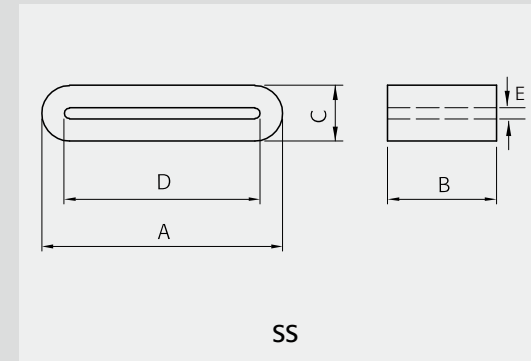


OR, OPS, ORS, SS CORES

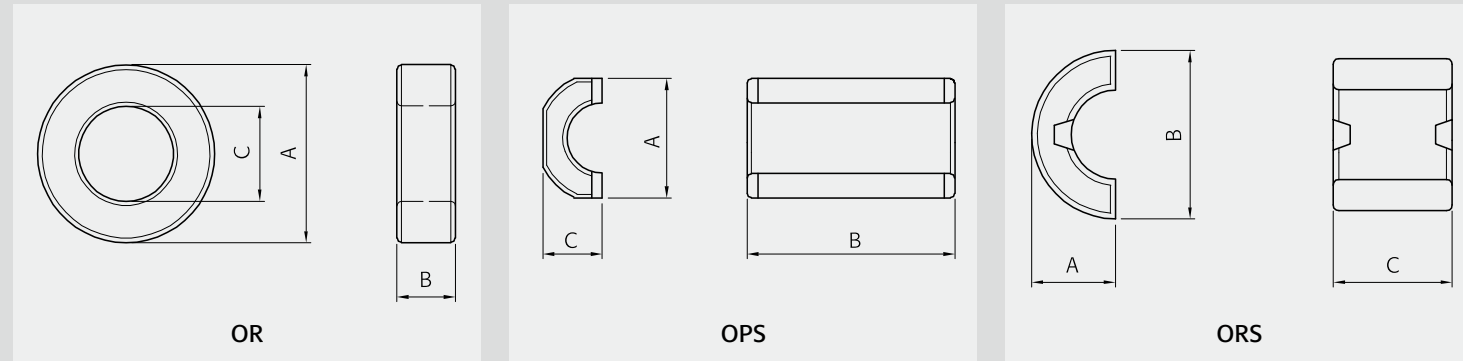

Part No.	Type	Dimensions in mm		
		A	B	C
OR9.5x5-4.75H	OR	9.55 ±0.30	5.00 ±0.30	4.75 ±0.25
OR12.5x5.1-7.6H	OR	12.50 ±0.40	5.10 ±0.30	7.60 ±0.40
OR18.2x6.2-11H	OR	18.20 ±0.50	6.20 ±0.50	11.00 ±0.50
OR18.3x10-9.7H	OR	18.30 ±0.40	10.00 ±0.40	9.70 ±0.40
OR18.3x12-9.7H	OR	18.30 ±0.40	12.00 ±0.40	9.70 ±0.40
OR18.4x10-9.5H	OR	18.40 ±0.40	10.00 ±0.40	9.50 ±0.40
OR18.4x12-9.5H	OR	18.40 ±0.40	12.00 ±0.40	9.50 ±0.40
OR19x10-10H	OR	19.00 ±0.50	10.00 ±0.50	10.00 ±0.50
OR21x12-13H	OR	21.10 ±0.50	11.90 ±0.50	13.20 ±0.50
OR23.5x9.5-12.6H	OR	23.50 ±0.40	9.50 ±0.30	12.60 ±0.40
OR28x14-14.5H	OR	28.00 ±0.50	14.00 ±0.50	14.50 ±0.50
OR29x7.5-19H	OR	29.00 ±0.50	7.50 ±0.50	19.00 ±0.50
OR33x26-20H	OR	33.00 ±0.40	26.00 ±0.30	20.00 ±0.40
OR34x12-20H	OR	33.70 ±0.50	12.00 ±0.40	20.30 ±0.50
OR34.8x12-21H	OR	34.80 ±0.40	12.00 ±0.50	21.00 ±0.40

Core Set Parameters					
C1(mm ⁻¹)	Le(mm)	Ae(mm ²)	Ve(mm ³)	AW(mm ²)	W(g)
1.799	20.7	11.5	239	17.72	2.85
2.476	30.3	12.2	371	45.36	2.06
2.013	44.0	21.9	961	95.03	5.69
0.990	41.2	41.6	1712	73.90	8.83
0.825	41.2	49.9	2054	73.90	11.87
0.950	40.8	42.9	1750	70.88	10.60
0.792	40.8	51.5	2101	70.88	11.77
0.979	42.6	43.5	1851	78.54	10.50
1.126	52.0	46.2	2398	136.85	11.10
1.061	53.2	50.1	2667	124.69	15.70
0.682	62.2	91.2	5668	165.13	31.39
1.981	73.2	36.9	2704	283.53	14.72
0.483	79.9	165.5	13220	314.16	66.00
1.033	81.3	78.7	6398	323.65	35.32
1.037	84.0	81.1	6812	346.36	37.28

Part No.	Type	Dimensions in mm		
		A	B	C
OPS18.4x28-9.5H	OPS	16.40 ±0.40	28.00 ±0.40	8.20 ±0.15
OPS18x28-10H	OPS	18.00 ±0.40	28.00 ±0.40	9.00 ±0.30
OPS22x28-11H	OPS	22.00 ±0.40	28.00 ±0.50	11.00 ±0.30
ORS25x12-15H	ORS	12.50 ^{+0.20} / _{-0.30}	25.00 ±0.40	12.00 ^{+0.20} / _{-0.40}
ORS16.4x13-8.2HA	ORS	8.30 ^{+0.00} / _{-0.30}	16.30 ±0.30	13.30 ^{+0.00} / _{-0.40}
ORS16.4x16-8.2HA	ORS	8.30 ^{+0.00} / _{-0.30}	16.30 ±0.30	16.10 ^{+0.00} / _{-0.40}

Core Set Parameters					
C1(mm ⁻¹)	Le(mm)	Ae(mm ²)	Ve(mm ³)	AW(mm ²)	W(g)
0.324	35.7	110.3	3940	52.81	28.45
0.324	39.2	121.1	4746	63.62	29.43
0.324	47.9	148.0	7089	95.03	45.03
6.157	38.5	6.2	240	113.10	18.74
0.750	36.6	48.8	1780	58.10	10.79
0.618	36.6	59.0	2150	58.10	13.24

Part No.	Type	Dimensions in mm					W(g)
		A	B	C	D	E	
SS29x10-8	SS	29.00 ±0.50	10.00 ±0.50	8.00 ±0.40	22.00 ±0.50	2.20 ±0.20	8.00
SS29x15-8	SS	29.00 ±0.50	15.00 ±0.30	8.00 ±0.30	21.80 ±0.50	2.00 ±0.30	13.00
SS31x12-4.7	SS	31.00 ±0.40	12.00 ±0.30	4.70 ±0.30	27.20 ±0.30	1.20 ±0.40	6.70
SS35x12-6	SS	35.00 ±0.40	12.00 ±0.30	6.00 ±0.30	30.00 ±0.30	1.00 ±0.20	10.80