



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Name: 847/897.5MHz SAW Band-Stop Filter SMD 3.0×3.0mm

TST Parts No.: TE0132A (This part is compliant with AEC-Q200)

Customer Parts No.: _____

Customer signature required
Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: _____ Sam Lin *Sam Lin*

Approval by: _____ Andy Yu *Andy Yu*

Date: _____ 2018/09/18

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Band Stop Filter 847/897 MHz DVB-T/LTE Notch SMD 3.0×3.0mm

MODEL NO.: TE0132A

Rev.:1.0

A. MAXIMUM RATING:

1. Input Power Level: 15 dB_m
2. DC voltage: 5 V
3. Operating Temperature: -40°C to +105°C
4. Storage Temperature: -40°C to +105°C
5. Moisture Sensitivity Level: Level 1 (MSL1)

B. CHARACTERISTICS:

Item	Unit	Min.	Typ.	Max.
Center frequency	MHz	-	847.0 897.5	-
Minimum Insertion Loss (470 ~ 790 MHz)	dB	-	0.2	0.8
Maximum Insertion Loss				
47.00 ~ 68.00 MHz	dB		0.2	1.0
174.00 ~ 230.00 MHz	dB		0.4	1.0
470.00 ~ 750.00 MHz	dB		1.5	2.0
750.00 ~ 790.00 MHz	dB		3.2	4.0 ⁽¹⁾
Attenuation (reference from 0dB)				
832.00 ~ 862.00 MHz	dB	18	26	-
880.00 ~ 915.00 MHz	dB	20	25	-
1452.00 ~ 1492.00 MHz	dB	20	26	-
1710.00 ~ 1990.00 MHz	dB	20	35	-
Source impedance	Z _S	Ω	-	50
Load impedance	Z _L	Ω	-	50


Note1. Specification for ILmax is 3.5dB for -10°C to +60°C.

C. Transfer Function :

Stop Band



Width Band

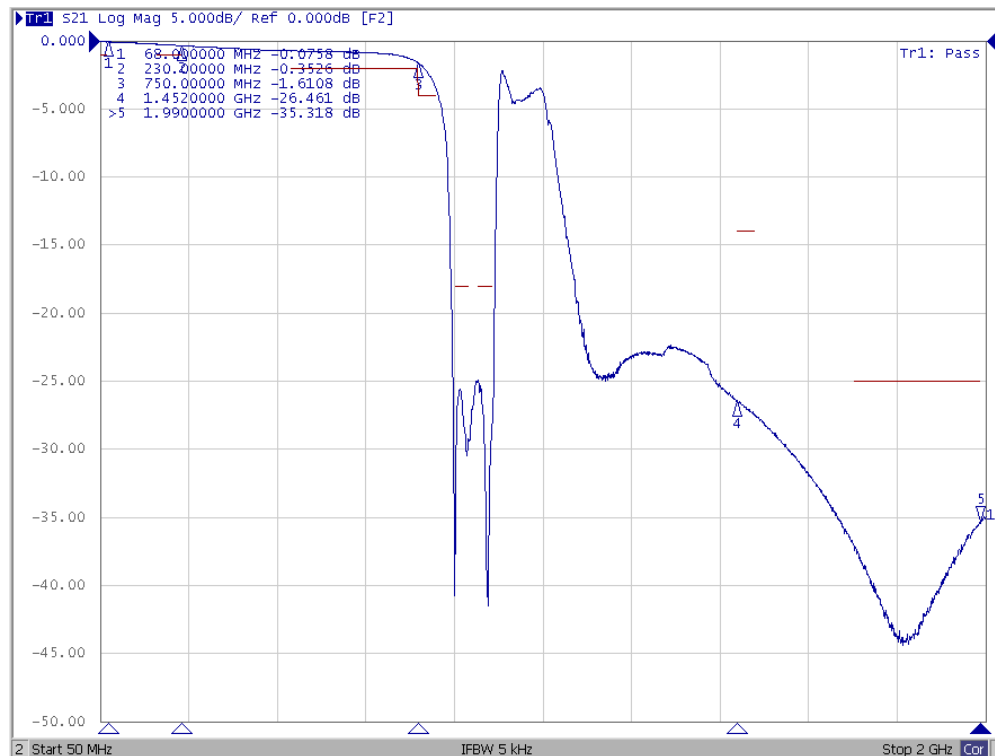


D. MEASUREMENT CIRCUIT:

ZS = 50 Ohm


ZL = 50 Ohm

Lp1 = 4.7 nH

Lp2 = 11.0 nH

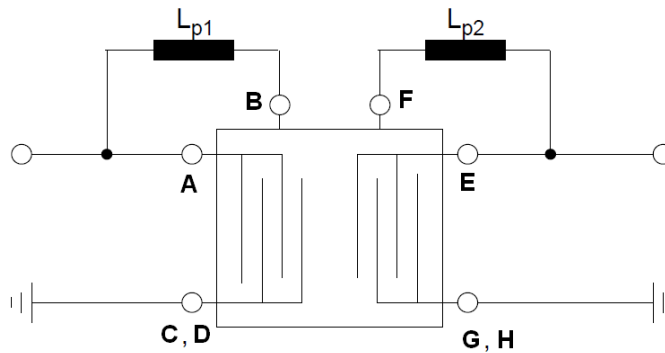

E. OUTLINE DRAWING:

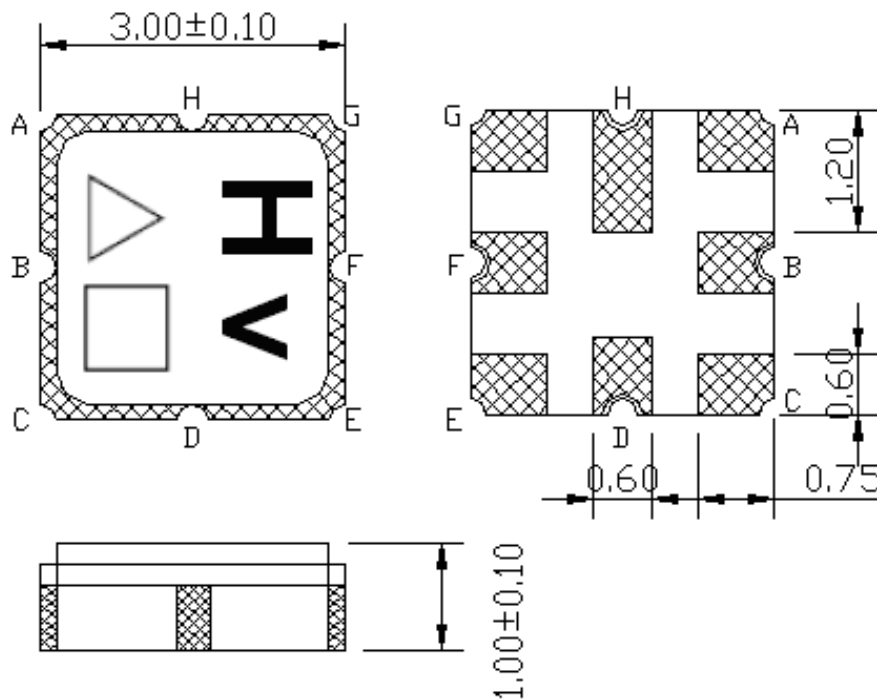


△ : Year Code (2009->9, 2010->0, ..., 2018->8)

□ : Date Code (Follow the table from planner each year)


WK01	WK02	WK03	WK04	WK05	WK06	WK07	WK08	WK09	WK10	WK11	WK12	WK13
A	B	C	D	E	F	G	H	I	J	K	L	M
WK14	WK15	WK16	WK17	WK18	WK19	WK20	WK21	WK22	WK23	WK24	WK25	WK26
N	O	P	Q	R	S	T	U	V	W	X	Y	Z
WK27	WK28	WK29	WK30	WK31	WK32	WK33	WK34	WK35	WK36	WK37	WK38	WK39
a	b	c	d	e	f	g	h	i	j	k	l	m
WK40	WK41	WK42	WK43	WK44	WK45	WK46	WK47	WK48	WK49	WK50	WK51	WK52
n	o	p	q	r	s	t	u	v	w	x	y	z

F. PCB FOOTPRINT:

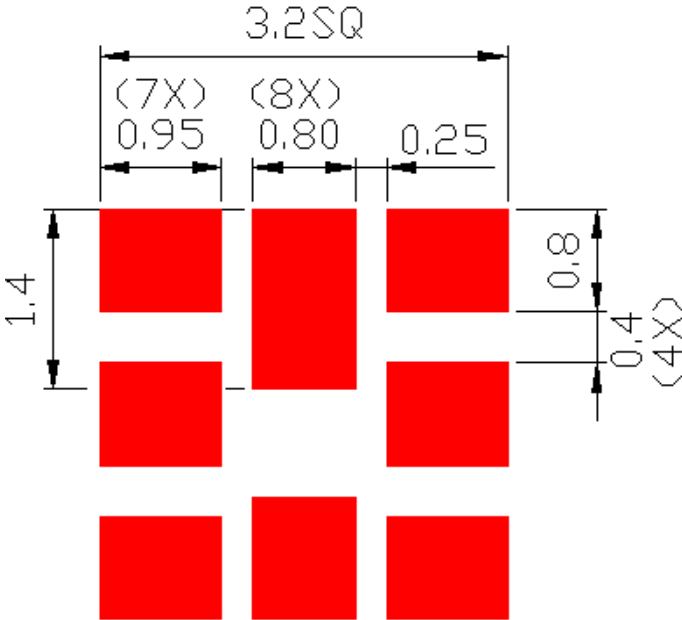


G. PACKING:

1. REEL DIMENSION

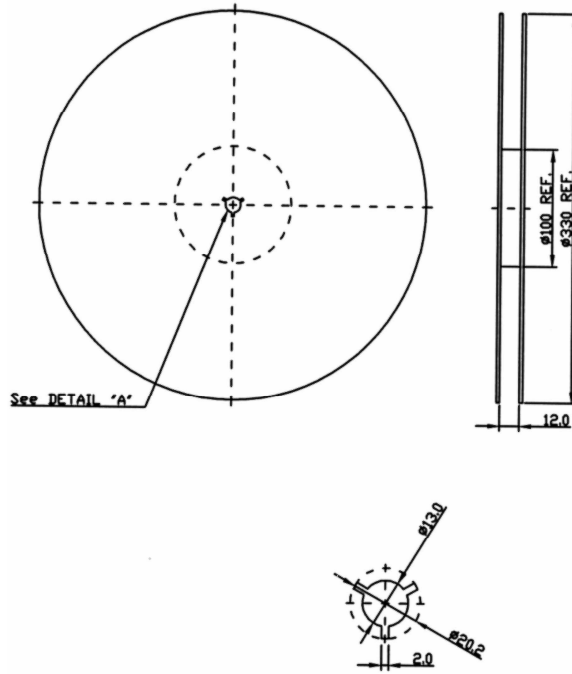

2. TAPE DIMENSION

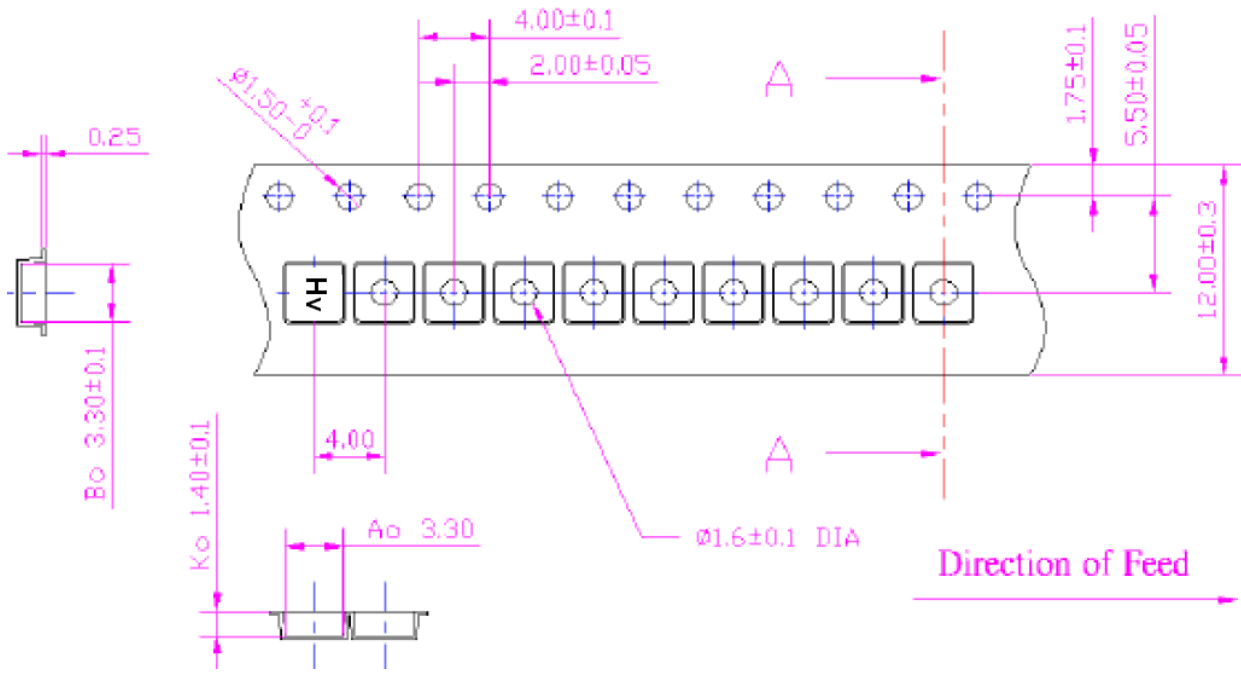

H. RECOMMENDED REFLOW PROFILE :

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 260°C +0/-5°C peak (20~40sec).
4. Time: 2 times.

